

3500/53M Electronic Overspeed Detection System


Bently Nevada* Asset Condition Monitoring

Description

The Bently Nevada* Electronic Overspeed Detection System for the 3500 Series Machinery Detection System provides a highly reliable, fast response, redundant tachometer system intended specifically for use as part of an overspeed protection system. It is designed to meet the requirements of American Petroleum Institute (API) Standards 670 and 612 pertaining to overspeed protection.

3500/53M modules can be combined to form a 2-out-of-2 or a 2-out-of-3 (recommended) voting system.

The Overspeed Detection System requires the use of a 3500 rack with redundant power supplies.



Specifications

Inputs

Signal:

Each Overspeed Detection module accepts a single transducer signal from a proximity probe transducer or magnetic pickup. The input signal range is +10.0 V to -24.0 V. The module internally limits signals that exceed this range.

Input Impedance:

20 k Ω .

Power Consumption:

8.0 watts, typical.

Transducers:

Bently Nevada 3300-5 mm Proximito*, 3300-8 mm Proximito, 7200-5mm Proximito, 7200-8mm Proximito, 7200-11mm Proximito, 7200-14mm Proximito, 3300-16mm HTPS, 3300 RAM Proximito, 3300XL-8mm Proximito, 3300XL-11mm Proximito, 3300XL-NSV Proximito, **or** Magnetic pickups.

Outputs

Front Panel LEDs

OK LED:

Indicates when the 3500/53M Module is operating properly.

TX/XR LED:

Indicates when the 3500/53M Module is communicating with other modules in the 3500 rack.

Bypass LED:

Indicates when the 3500/53M Module is in Bypass Mode.

Test Mode LED:

Indicates when the 3500/53M is in Test Mode.

Alarm LEDs:

Indicates that an alarm condition has occurred with the associated relay.

Health LED:

Indicates when there is a fatal error or processor error.

Buffered Transducer Outputs:

The front of each module has one coaxial connector for buffered output. Each connector is short circuit and ESD protected.

Output Impedance:

550 Ω .

Transducer Power Supply:

-24 Vdc, 40 mA maximum.

Recorder:

+4 to +20 mA. Value is proportional to module full-scale range (rpm). Module operation is unaffected by short circuits on recorder output.

Application Warning: The +4 to +20 mA recorder output is not to be used as the input to the speed control governor. The emergency overspeed protection system must be separate from the speed controller.

Voltage Compliance (current output):

0 to +12 Vdc range across load. Load resistance is 0 to 600 Ω .

Resolution:

0.3662 μ A per bit \pm 0.25% error at room temperature \pm 0.7% error over temperature range. Update rate approximately 100 ms.

Relays

Type:

Single-pole, double-throw (SPDT) relays.

Environmental Sealing:

Epoxy sealed.

Arc Suppressers:

250 Vrms, installed as standard.

Contact Ratings

Max switched power:

dc: 120 W

ac: 600 VA.

Resistive Load

Max switched current:

5A

Min switched current:

100 mA @ 5 Vdc

Max switched voltage:

dc: 30 Vdc

ac: 250 Vac.

Contact Life:

100,000 @ 5 A, 24 Vdc or 120 Vac.

Operation:

Each alarm relay is switch selectable for Normally De-energized or Normally Energized.

Contact Ratings for Hazardous Area Systems (Approvals Option 02)

Cannot Exceed

5 A and 30 V max

Signal Conditioning

Specified at +25 °C (+77 °F).

Frequency Response

Speed Input:

The 3500 Overspeed Protection Module will support from 1 to 255 events per revolution with a maximum full-scale range of 99,999 rpm and a maximum input frequency of 20 kHz. Minimum input frequency for proximity transducers is 0.0167 Hz (1 rpm for 1 event/revolution) and for passive magnetic pickups is 3.3 Hz.

RPM Accuracy:

Less than 100 rpm = ± 0.1 rpm,
100 to 10,000 rpm = ± 1 rpm,
10,000 to 99,999 rpm = $\pm 0.01\%$.

Transducer Conditioning

Auto Threshold:

Use for any input above 0.0167 Hz (1 rpm for 1 event/revolution). Minimum signal amplitude for triggering is 1 volt peak-to-peak.

Manual Threshold:

User selectable from +9.7 Vdc to -23.7 Vdc. Minimum signal amplitude for triggering is 500 millivolts peak-to-peak.

Hysteresis:

User selectable from 0.2 to 2.5 volts.

Alarms

Alarm Setpoints:

Under and Over Alert levels (setpoints) can be set for speed. In addition, a Danger (Overspeed) setpoint can be set for speed. All alarm setpoints are set using software configuration. Alarms are adjustable and can normally be set from 0 to 100% of full-scale of speed full-scale range.

Alarm Time

Delays:

Less than 30 ms above 300 Hz.

Proportional Values

Proportional values are speed measurements used to monitor a machine. The Overspeed Detection Module returns the following proportional values:

Overspeed

Speed:

The primary value for the channel. This value can be included in contiguous registers in the Communications Gateway Module.

Peak Speed:

Peak Speed proportional values are for display purposes only. No alarming is provided for Peak Speed.

Environmental Limits

Operating

Temperature:

-30 °C to +65 °C
(-22 °F to +149 °F)

Storage

Temperature:

-40 °C to +85 °C
(-40 °F to +185 °F)

Humidity:

95%, non-condensing.

Compliance and Certifications

EMC

Standards:

EN 61000-6-2

Immunity for Industrial Environments

EN 55011/CISPR 11

ISM Equipment

EN 61000-6-4

Emission for Industrial Environments

European Community Directives:

EMC Directive 2004/108/EC

Electrical Safety

Standards:

EN 61010-1

European Community Directives:

2006/95/EC Low Voltage

Declaration of Conformity

134036

Hazardous Area Approvals

North American


Approval Option (01)

Ex nC [L] IIC: Class I, Div 2
AEx nC IIC: Class 1, Div 2
Groups A, B, C, D
T4 @ Ta = -20 °C to +65 °C
(-4 °F to +150 °F)
Per drawing 149243

ATEX

Approval Option (02)

**For Selected Ordering Options
with ATEX/CSA agency
approvals:**

 II 3/(3) G

Ex nC[nL Gc] IIC T4 Gc

T4 @ Ta = -20°C to +65°C

(-4°F to +150°F)

For further certification and approvals information please visit the following website:

<http://www.ge-mcs.com/bently>

Specifications and Ordering Information
Part Number 141539-01
Rev. G (10/13)

Physical

Monitor Module

Dimensions

(Height x Width
x Depth):

241.3 mm x 24.4 mm x 241.8 mm
(9.50 in x 0.96 in x 9.52 in).

Weight:

0.82 kg (1.8 lb.).

I/O Modules

Dimensions

(Height x Width
x Depth):

241.3 mm x 24.4 mm x 99.1 mm
(9.50 in x 0.96 in x 3.90 in).

Weight:

0.45 kg (1.0 lb.).

Rack Space Requirements

Monitor Module:

1 full-height front slot/per
channel.

I/O Modules:

1 full-height rear slot/per channel.

Ordering Considerations

General

If the 3500/53M is added to an existing 3500 System the following firmware and software versions (or later) are required:

3500/22 Module Firmware – Revision 1.7
3500/01 Software – Version 4.7
3500/02 Software – Version 2.52
3500/03 Software – Version 1.52
3500/53M Firmware- Revision 5.49

The use of redundant power supplies in a 3500 rack containing the Overspeed Detection System is required.

Ordering Information

Electronic Overspeed Detection System

3500/53-AXX-BXX

A: Channel Option

- 02** Two Channel System
- 03** Three Channel System

B: Agency Approval Option

- 00** None
- 01** CSA/NRTL/C (Class 1, Div 2)
- 02** ATEX/CSA (Class 1, Zone 2)

Spares

288062-01

3500/53M Overspeed Detection
Module

323133-01

Overspeed Detection I/O Module

04425545

Grounding Wrist Strap (single use)

00580438

Connector Header, Internal
Termination, 4-position, Green

00580436

Connector Header, Internal
Termination, 6-position, Green


00580432

Connector Header, Internal
Termination, 10-position, Green

134939-01

3500/53 Overspeed Detection
Manual

Graphs and Figures

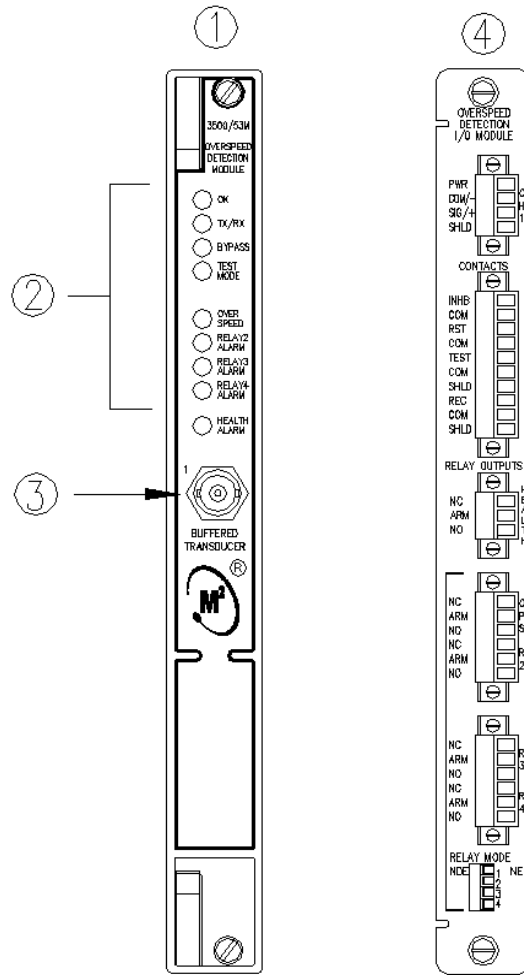

- 1) Main Module, front view.
- 2) Status LEDs
- 3) Buffered transducer output. Provides an unfiltered output for the transducer. The output is short-circuit protected.
- 4) I/O Module, rear view.

Figure 1: Front and rear view of the Electronic Overspeed Detection Module

Maximum Switching Capacity DC Resistive Load

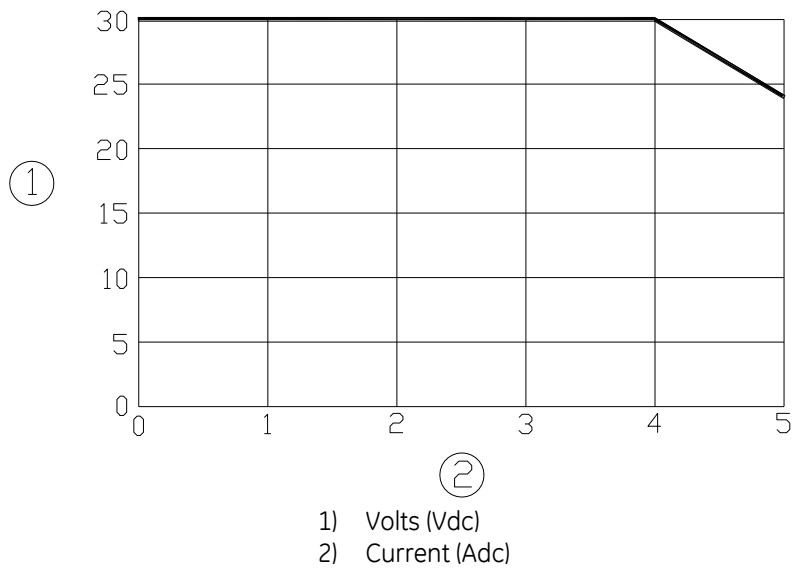


Figure 2

Maximum Switching Capacity AC Resistive Load

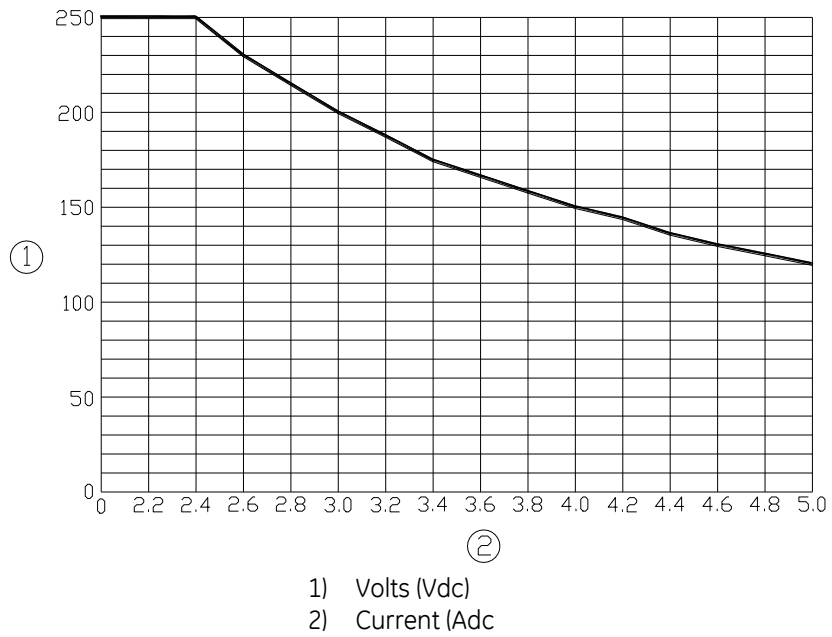


Figure 3

* Denotes a trademark of Bently Nevada, Inc., a wholly owned subsidiary of General Electric Company.

© 1999 – 2013 Bently Nevada, Inc. All rights reserved.

Printed in USA. Uncontrolled when transmitted electronically.

1631 Bently Parkway South, Minden, Nevada USA 89423

Phone: 775.782.3611 Fax: 775.215.2873

www.ge-mcs.com/bently